

Burnt Hills Display Location


786 Rt 50 Burnt Hills NY 12027

Main Office

1208 US Rt 9W Selkrik NY 12158 518-767-2671

Schodack Display Location

Peacedale Rd and Rt 9 Schodack Landing NY 12156

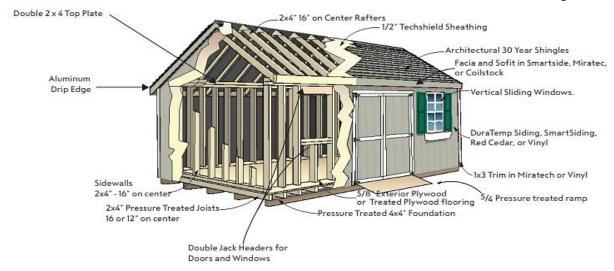

Sub Foundation: Pressure treated 4x4s 30 yr. (3 to 5 depending on building width)

Floor Joist: 16" on center pressure treated 2x4s

Floor: 5/8" exterior plywood to insure tightly seemed floor (pressure treated available)

Framing: 2x4s 16" on center, double top plate, door and window jacks **Exterior Siding:** 1/2" LP SmartSide, 5/8" Dura or 1/2" plywood with vinyl

Roof Rafters: 2x4s 16 " on center

Roof Sheathing: 1/2" LP TechShield, or 1/2" OSB or 1/2" cdx plywood

Shingles: 30 yr. architectural asphalt

Hardware: 3 heavy duty hinges per door and keyed lock set handle

Doors: Heavy duty 2x3" reinforced with cross bracing or fiberglas

raised panel - 4', 5' or 6' double

Windows: two windows with screens included,

except 6x8, 8x8 & 8x10 has one

Vents: two gable air vents

Shutters: standard on vinyl sheds only **Ramp:** Pressure treated 5/4 material

lle	41/4" [68"	4'/4"		
SS		8' wide			
	1444"	8" ⊔	1444"		
		10' wide			
	31/4" 23" 4	34" 🕌 34"	23" 📮 3¼"		
12' wide					
314"	Џ 33" Џ	34" 🕌 34"	33" 🕌 3¼"		
14' wide					
. <u>T</u>	J 43½" ☐	34" 🕌 34"	431/2" 431/41		

Customer:	Size:	Style:	
Siding:	Color:	Trim:	
Cost:	Address:		

314